

INSTRUCTION SHEET




Product	Bayonet Quick Lock
Article no.	Type
0000112783	125 mm (5 in.)

PURPOSE:


The Bayonet is used for vehicles in which the Plymovent Magnetic Grabber® Tailpipe Adapter has been installed. When the Bayonet Quick Lock is added to the Tailpipe Adapter, the vehicle is compatible with the Plymovent Pneumatic Grabber® or similar nozzle.

HOW TO CONNECT THE BAYONET QUICK LOCK:

1. Pull out the spring-loaded plunger pins. Twist the pins a quarter turn to keep them retracted.

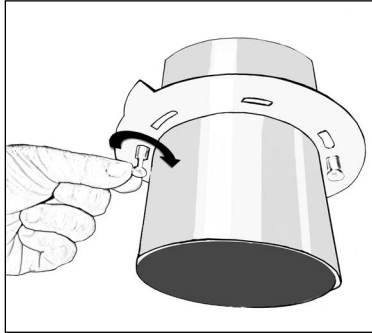

2. Position the Bayonet Quick Lock into the Magnetic Tailpipe Adapter and twist it clockwise until it stops.

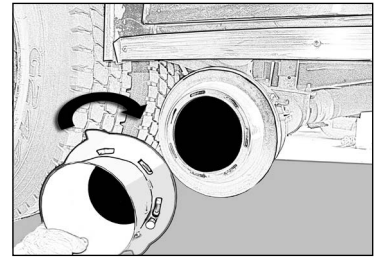


Twist the spring-loaded plunger pins again to return them to their locked position.

The Pneumatic Grabber nozzle can now be securely connected to the vehicle.

HOW TO DISCONNECT THE BAYONET QUICK LOCK:

CAUTION: Be careful when removing the Bayonet Quick Lock, as components may be hot.

1. Pull out the two spring-loaded plunger pins and twist them a quarter turn so that they remain retracted.

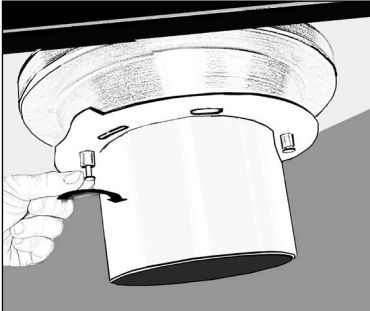

2. Twist the Bayonet Quick Lock counter clockwise and pull to remove from the Magnetic Grabber Tailpipe Adapter.

If the unit is difficult to twist, use the pointed grabbers on the brim plate for extra leverage.

